
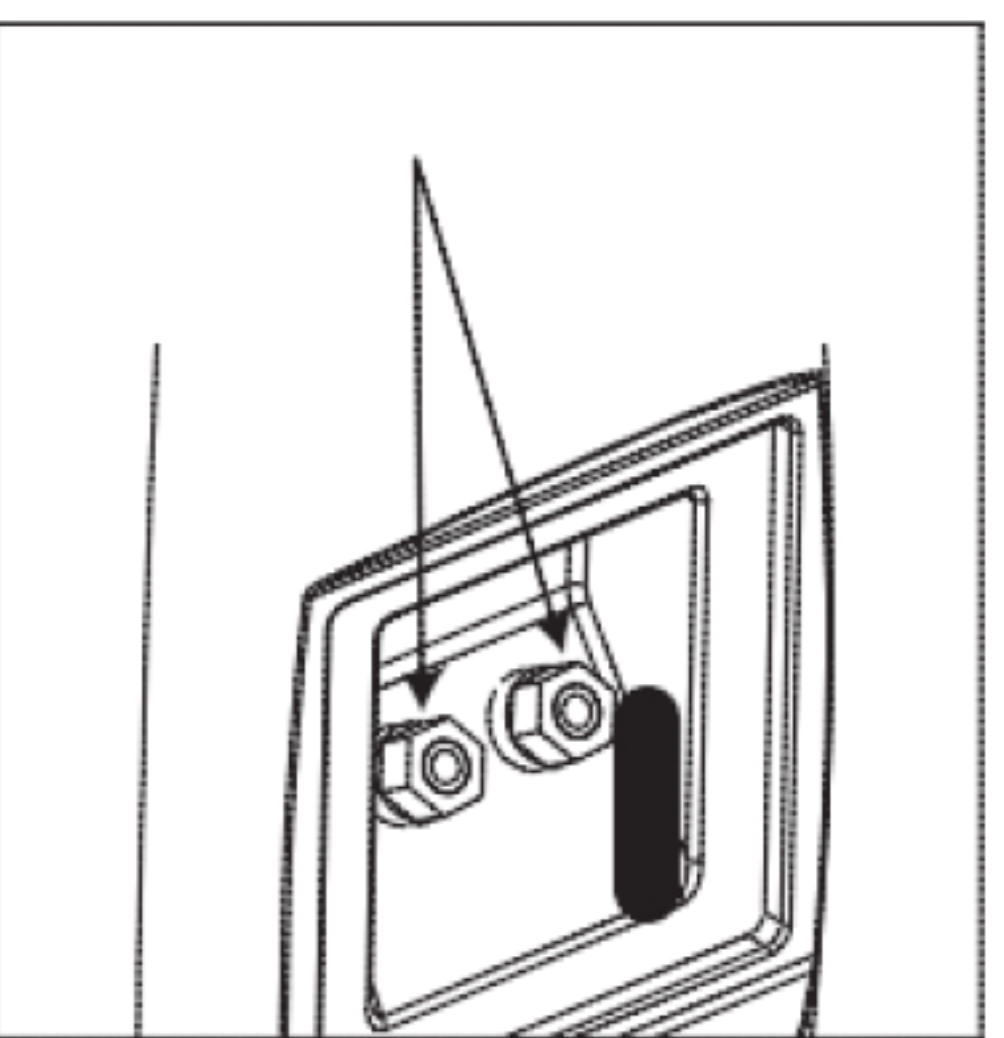


Description	Waterproof Outdoor Speaker
Woofer	6.5" Injection polypropylene Cone
Tweeter	1" Aluminum Dome
Freq Response	50Hz - 20KHz
Power	150W
Sensitivity	88dB
Impedance	8Ω
Dimension	344.5x220x227.3mm
Depth	227.3mm
Product Weight	4kg

Speaker Installation:

The RIFF-651 is supplied with a U-shaped mounting bracket that can be installed either vertically or horizontally. Use the speaker's retention knobs to screw the top and bottom of the mounting bracket to the speaker. The speaker terminal on the RIFF-651 is covered in a rubber film. When wiring the speaker, assure that no exposed wires or materials are left on the speaker terminal.

After mounting the bracket, loosen the retention knobs on both sides of the speaker and slide the speaker onto the bracket. Then tighten the retention knobs to secure in place.

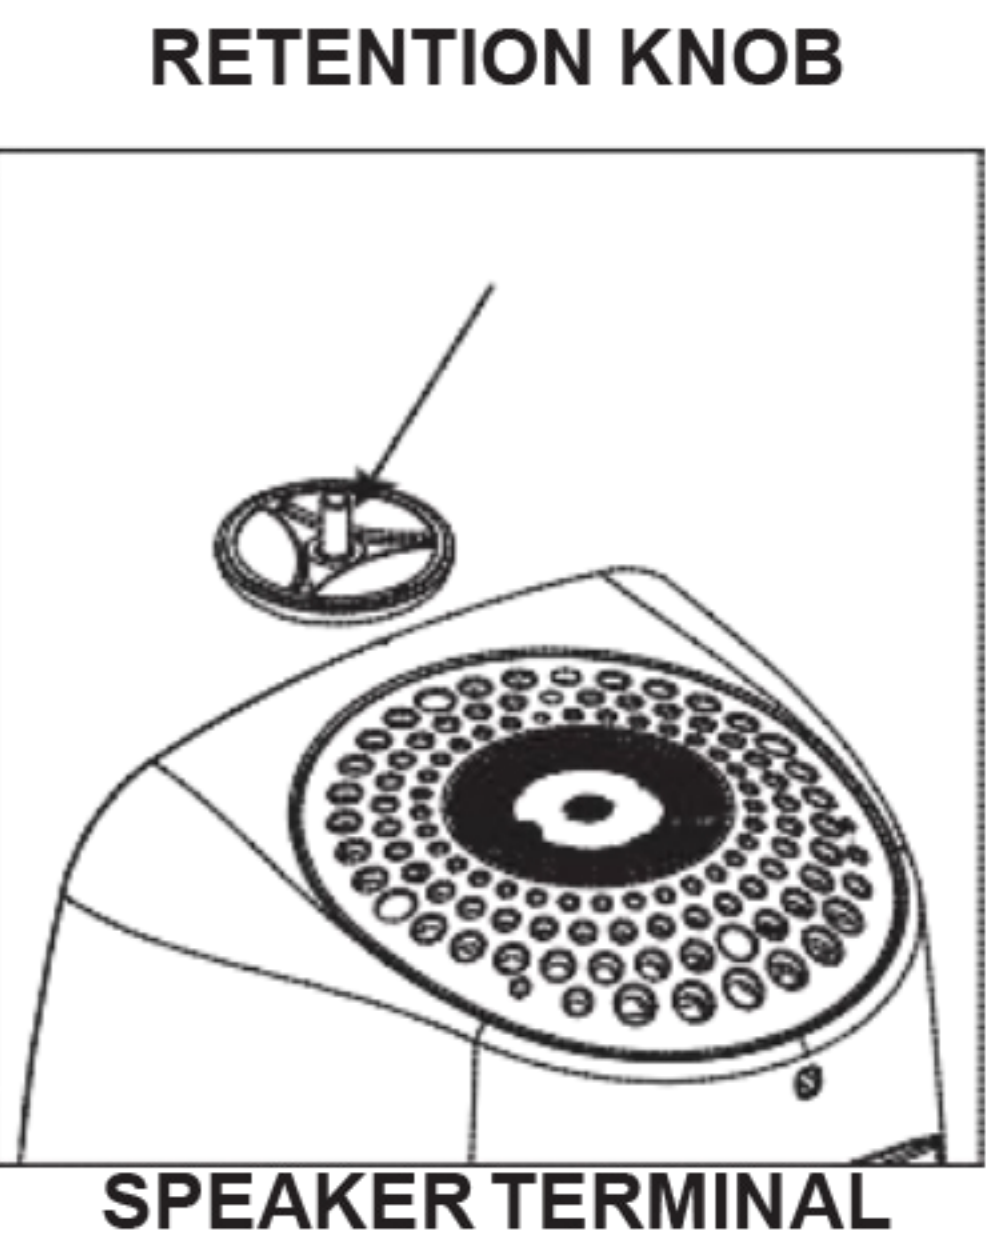

Angle Adjustment:

To adjust the speaker angle, loosen the retention knobs on the sides of the speaker and rotate the speaker to the desired angle. It is recommended that speakers are angled towards the listening area. Once adjusted, tighten the retention knobs to secure the speaker in place.

